

MG-12200A is a GEL Deep cycle battery of superior design for frequent cyclic discharge applications under extreme temperature. By using strong grid to insure reliable performance under frequent cyclic discharge use. 400 cycles could be available at 100% DOD. Offering extra-durable cyclic performance, high efficiency of recovery ,that is more suitable for solar, mobility, E-toll, marine , deep discharge UPS etc. .Magnum

Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	200Ah@20hr-rate to 1.75V per cell @25°C
Weight	Approx. 60.0 Kg
Max. Discharge Current	2000 A (5 sec)
Internal Resistance	Approx. 6 mΩ
Operating Temperature Range	Discharge: -40°C~60°C Charge:-20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C±5°C
Float charging Voltage	13.6 to 13.8 VDC/unit Average at 25°C
Recommended Maximum Charging Current Limit	40A
Equalization and Cycle Service	14.2 to 14.4VDC/unit Average at 25°C
Self Discharge	Magnum Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
Terminal	Terminal F12/F16
Container Material	A.B.S. (UL94-HB), Flammability resistance of UL94-V1 can be available upon request.



MH28539





G4M20206-0910-E-16



ISO9001:2000 Certificate

Dimensions


Unit: mm Dimension: 522(L)×240(W)×219(H)

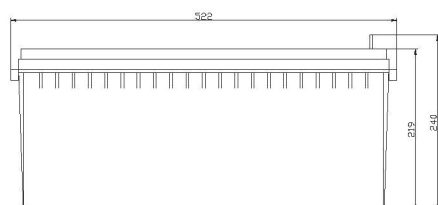

Terminal F12/F16



Terminal F16



Constant Current Discharge Characteristics: A (25°C)

F.V/Time	1HR	2HR	3HR	5HR	8HR	10HR	20HR	30HR	50HR	70HR	100HR	120HR
9.60V	116.7	66.61	46.85	32.65	22.54	19.06	10.08	6.853	4.233	3.167	2.318	2.016
10.0V	116.1	66.11	46.68	32.46	22.35	18.87	9.895	6.728	4.156	3.110	2.276	1.979
10.2V	115.1	65.61	46.32	32.27	22.17	18.69	9.712	6.604	4.079	3.052	2.234	1.942
10.5V	114.0	65.11	46.14	31.89	21.99	18.51	9.528	6.479	4.002	2.995	2.192	1.906
10.8V	111.3	63.94	44.88	31.31	21.62	18.32	9.345	6.355	3.925	2.937	2.149	1.869
11.1V	105.7	61.11	42.91	29.97	20.71	17.77	8.795	5.981	3.694	2.764	2.023	1.759

Constant Power Discharge Characteristics: W (25°C)

F.V/Time	1HR	2HR	3HR	5HR	8HR	10HR	20HR	30HR	50HR	70HR	100HR	120HR
9.6V	1335	766.3	540.7	378.0	261.5	214.3	113.2	76.97	47.54	35.57	26.03	22.64
10.0V	1328	763.3	539.6	375.7	260.4	212.1	112.1	76.22	47.08	35.23	25.78	22.42
10.2V	1318	756.3	536.4	374.6	258.2	211.0	111.0	75.47	46.61	34.88	25.53	22.20
10.5V	1305	749.3	533.2	371.1	256.0	208.8	109.9	74.72	46.15	34.54	25.27	21.98
10.8V	1273	738.3	520.2	365.3	250.5	206.6	108.8	73.98	45.69	34.19	25.02	21.76
11.1V	1206	704.2	494.4	346.9	241.8	200.0	104.4	70.99	43.85	32.81	24.01	20.88


All mentioned values are average values.

MG-12200-A


12V200Ah

Magnum®


Life characteristics of cyclic use

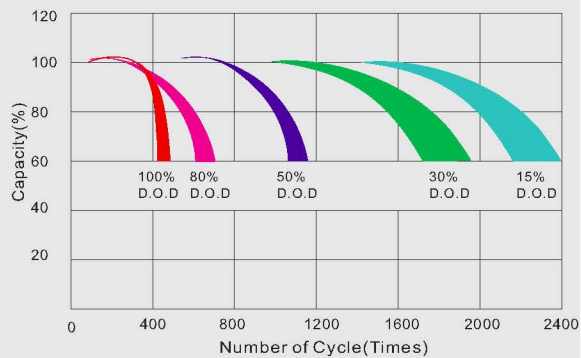


Storage characteristic

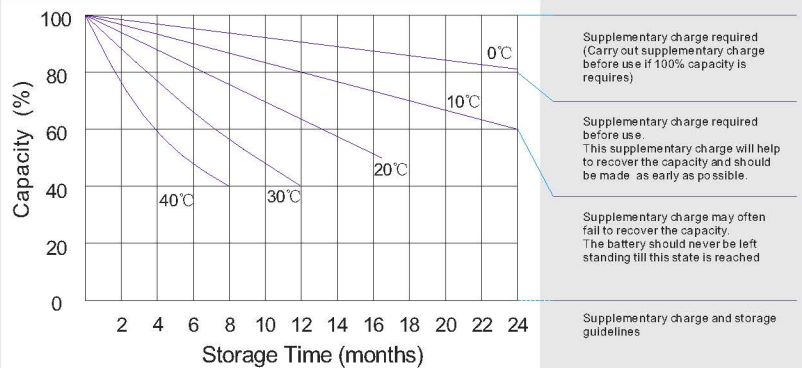

Charge characteristic curve for cyclic use

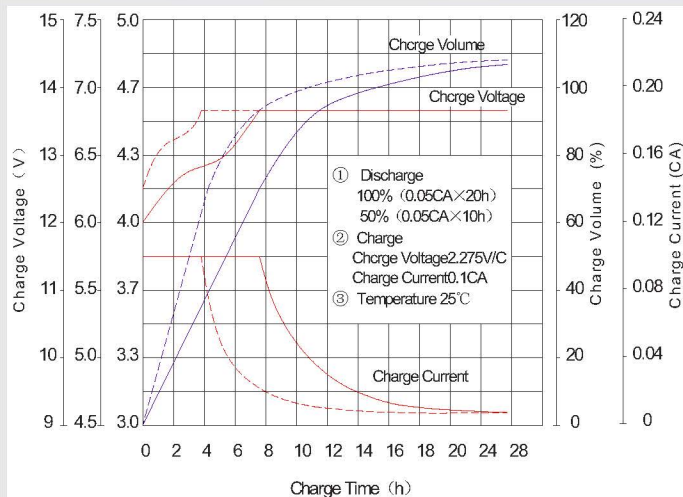

Discharge characteristic curve

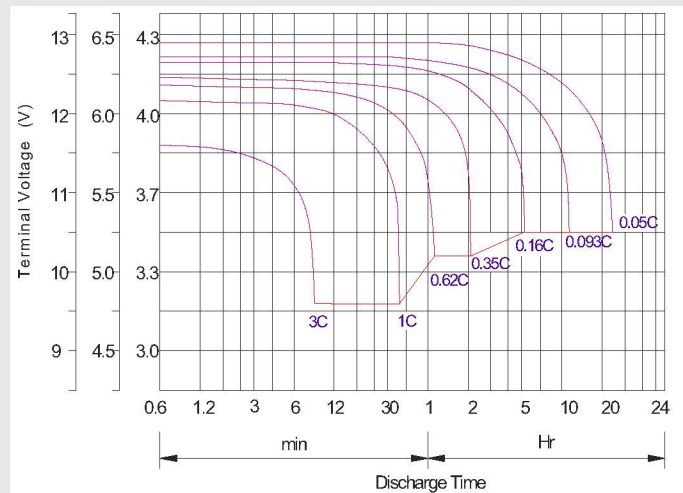

Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

Maintenance & Cautions

Cycle service

- ※ Avoid battery over discharge, especially battery series connection use.
- ※ Charged with recommend voltage, ensure battery can be full recharged.
- In general, recharge capacity should be 1.1-1.15 times discharge capacity.
- ※ Effect of temperature on cycle charge voltage: -4mV/°C/Cell.
- ※ There are a number of factors that will affect the length of cyclic service.
- The most significant are depth of discharge, ambient temperature, discharge rate, and the manner in which the battery is recharged.
- Generally speaking, the most important factors is depth of discharge.

Charge the batteries at least once every six months, if they are stored at 25°C.

Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h